



Product Specification and Submittal Form

Z - Members (Z FURRING, Z PURLIN)

MANUFACTURER

Steeler, Inc.
 10023 Martin Luther King Jr. Way S.
 Seattle, WA 98178
 Phone: (206) 725-2500
 Fax: (206) 725-1700

Steeler, Inc.
 6851 Smith Ave.
 Newark, CA 94560
 Phone: (510) 505-9595
 Fax: (510) 505-0200

DESCRIPTION

Z Furrings are fabricated in 1", 1-1/4", 1-1/2", 2", 2-1/2", 3-1/2", 4", 6", 8", 10", 12", 14" and 16" widths from 25 gauge to 10 gauge steel. The flange sizes are 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 3-1/2". Standard length 10' and special lengths are available.

MATERIALS

Z Furring section is fabricated from **25 to 10 gauge** hot dipped galvanized steel conforming to ASTM A653 or equal.

COLOR CODE


18 mil - Clear
 24 mil - Brown
 27 mil - Black
 30 mil - Pink
 33 mil - White
 43 mil - Yellow
 54 mil - Green
 68 mil - Orange
 97 mil - Red
 118 mil - Blue
 Painted on ends.

RECOGNITION


ICC-ES Report ESR-2054.

ASTM & Code Standards

- AISI, North American Specification for the Design of Cold-Formed Steel Structural Members 2001 Edition with 2004 Supplement
- ASTM A370, Standard Test Methods and Definitions for Mechanical Testing of Steel Products
- ASTM A1003, Standard Specification for Sheet Steel, Carbon, Metallic and Non-Metallic Coating for Cold-Formed Framing Members.
- Steeler's structural framing comply with 2006 International Building Code (IBC- 2006)
- ASTM C955, Standard Specification for Structural Steel Framing Members.
- ASTM C754, Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products.
- ASTM C1513, Standard Specification for Steel Tapping Screws for Cold-Formed Steel Framing Connections.
- ASTM C645, Standard Specification for Nonstructural Steel Framing Members.

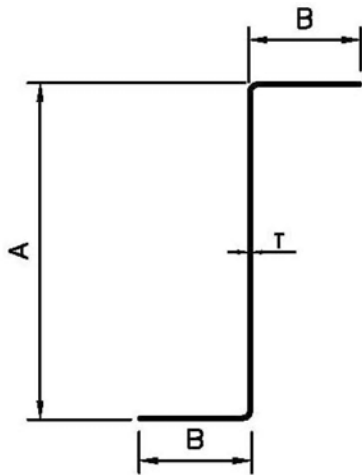

Z-Members without Lips
 (Z FURRING)

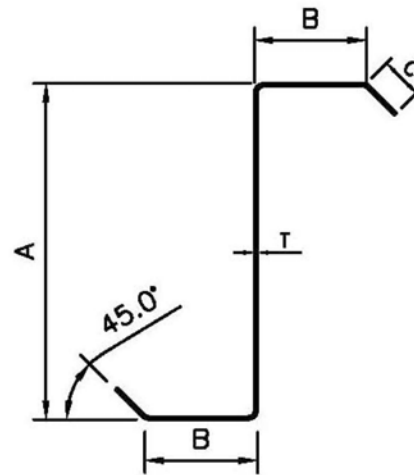

Z-Members with Lips
 (Z PURLIN)