










# STEELER® INC.

## Construction Screws



STEELER® Construction Screws are Produced in ISO 9002 & ISO 14001 Certified Environments and Meet or Exceed one or more of the following ASTM Designations: C 954, C 1002, or C 1513.

| DESCRIPTION   | PART #   | SIZE          | QTY/BOX | NET WT     | APPLICATION   |
|---|--|---------------|---------|------------|---|
| <b>SUPER STEELERS™</b>  | 168  | # 6 X 1"      | 10M     | 28.6       | 1/4"-1/2" GYP. TO 25GA-20GA STEEL   |
|                     | 268 & 268YZ  | # 6 X 1-1/8"  | 10M     | 30.8       | 1/2"- 5/8" GYP. TO 25GA-20GA STEEL  |
|   | 368  | # 6 X 1-1/4"  | 8M      | 27.8       | 5/8" GYP. TO 25GA-20GA STEEL  |
|   | 468 & 468YZ  | # 6 X 1-5/8"  | 5M      | 21.6       | DOUBLE LAYERS OF GYPSUM TO 25GA & 20GA STEEL  |
|   | 768  | # 6 X 2"      | 5M      | 26.6       | MULTIPLE LAYERS OF GYPSUM OR OTHER MATERIALS TO 25GA & 20GA STEEL   |
|   | 868 & 868YZ  | # 8 X 2-1/4"  | 4M      | 22         | DEEP RECESS SHARP POINT   |
|   | 968 & 968YZ  | # 7 X 2-1/2"  | 2.5M    | 19.1       |   |
|   | 1168 & 1168YZ                                      | # 8 X 3"      | 2M      | 20.2       |   |
|   | 1268 & 1268YZ                                      | # 10 X 3-1/2" | 1M      | 18         |   |
|   | 1368 & 1368YZ                                      | # 10 X 4"     | 1M      | 20.7       |   |
|   | 1568 & 1568YZ                                      | # 10 X 5"     | 1M      | 24.6       |   |
| 1768 & 1768YZ   | # 10 X 6"  | 1M            | 29      |            |   |
| * Z or YZ denotes availability in zinc coating.   |  |               |         |            |   |
| <b>HI-LO SUPER STEELERS™</b>  | 368HL  | # 6 X 1-1/4"  | 8M      | 27.7       | 5/8" GYP. TO 26GA-20GA STEEL  |
|                    | 468HL  | # 6 X 1-5/8"  | 5M      |            | HIGH-LOW THREAD - FASTER MORE HOLDING IN LIGHT GAUGES   |
|   | 768HL  | # 6 X 2"      | 5M      |            |   |
| <b>SUPER FRAMER</b>   | 23 & 23Z   | # 7 X 7/16"   | 15M     | 37.6       | FRAMING 25 GA & 20 GA STEEL<br>DEEP RECESS SHARP POINT  |
|                    | <b>SUPER LATHERS</b>                               |               |         |            |   |
|   | 31 & 31Z   | # 8 X 1/2"    | 10M     | 35.2       | METAL LATH TO 25 GA & 20 GA STEEL   |
|   | 32 & 32Z   | # 8 X 1"      | 5M      | 26.6       |   |
|                   | 33 & 33Z   | # 8 X 1-1/4"  | 5M      | 31.2       | FRAMING 25 GA & 20 GA STEEL   |
|   | <b>SUPER HEX FRAMERS</b>                           |               |         |            |   |
|                  | 25AZ   | # 8 X 1/2"    | 10M     | 29.3       | MULTIPURPOSE SHEET METAL AND HVAC WORK. FRAMING 25 GA & 20 GA STEEL STUD AND TRACK. SIDING AND AWNING TO WOOD FRAME |
|   | 25BZ   | # 8 X 3/4"    | 10M     | 37         |   |
|   | 25CZ   | # 8 X 1"      | 8M      | 37.9       |   |
|   | 25DZ   | # 8 X 1-1/4"  | 5M      | 27.9       |   |
|   | 25EZ   | # 8 X 1-1/2"  | 5M      | 32.3       |   |
|   | HWH14-1  | # 14 X 1"     | 4M      | 55.5       |   |
| HWH14-114   | # 14 X 1-1/4"                                      |               |         |            |   |
| <b>SUPER WOODIES™</b>   | 100 & 100YZ  | # 6 X 1"      | 10M     | 28.6       | 1/4" - 1/2" GYPSUM TO WOOD  |
|                  | 200 & 200YZ  | # 6 X 1-1/8"  | 10M     | 30.8       | "   |
|   | 300 & 300YZ  | # 6 X 1-1/4"  | 8M      | 27.8       | 1/2" - 5/8" GYPSUM TO WOOD  |
|   | 400 & 400YZ  | # 6 X 1-5/8"  | 5M      | 21.6       | DOUBLE LAYER OF GYPSUM TO WOOD  |
|   | 700 & 700YZ  | # 6 X 2"      | 5M      | 26.6       | MULTIPLE LAYERS OF GYPSUM OR OTHER MATERIALS TO WOOD  |
|   | 800 & 800YZ  | # 6 X 2-1/4"  | 4M      | 22         | DEEP RECESS SHARP POINT   |
|   | 900 & 900YZ  | # 7 X 2-1/2"  | 2.5M    | 19.1       |   |
|   | 1100 & 1100YZ                                      | # 8 X 3"      | 2M      | 20.2       |   |
|   | COARSE THREAD, SHARP POINT<br>DEEP RECESS          |               |         |            |   |
| <b>SUPER LAMINATING</b>   | 12   | # 10 X 1-1/2" | 5M      | 38.7       | TEMPORARY GYPSUM TO GYPSUM  |
|                  | <b>RUST RESISTANT SCREWS</b>                       |               |         |            |   |
|   | 300R1K   | # 6 X 1-1/4"  | 8M      | BUGLE HEAD | COARSE THREAD, SHARP PT. 1000 HR  |
|   | 400R1K   | # 6 X 1-5/8"  | 5M      | BUGLE HEAD | COARSE THREAD, SHARP PT. 1000 HR  |
|   | 700R1K   | # 7 X 2"      | 5M      | BUGLE HEAD | COARSE THREAD, SHARP PT. 1000 HR  |
|   | 900R1K   | # 8 X 2-1/2"  | 2.5M    | BUGLE HEAD | COARSE THREAD, SHARP PT. 1000 HR  |
|   | 1100R1K  | # 8 X 3"      | 2M      | BUGLE HEAD | COARSE THREAD, SHARP PT. 1000 HR  |
|   | 14R1K  | # 6 X 1-1/4"  | 8M      | BUGLE HEAD | FINE THREAD, DRILL PT., 1000 HR   |
|   | 16R1K  | # 7 X 1-7/8"  | 4M      | BUGLE HEAD | FINE THREAD, DRILL PT., 1000 HR   |
|   | 44R2KMAG   | # 10 X 3/4"   | 5M      | WAFER HEAD | HEAVY GAUGE FRAMING, 2000 HR  |
|   | GRAY RUSPERT COATING, DEEP RECESS, FAST DRILL TIME |               |         |            |   |
| RECOMMENDED FOR EXTERIOR SHEATHING APPLICATIONS AND HIGH MOISTURE AREAS (KITCHENS, BATHROOMS, ETC.) |  |               |         |            |   |
| <b>CABINET SCREWS</b>   | 90-114   | #6 X 1-1/4"   | 10M     |            | CABINET SCREWS ARE USED FOR CABINET & FACE FRAME INSTALLATION   |
|                  | 90-112(Z)SQ  | #6 X 1-1/2"   | 5M      |            | WOOD SURFACE FROM SPLITTING   |
|   | 90-212ZSQ  | #8 X 2-1/2"   | 2.5M    |            |   |

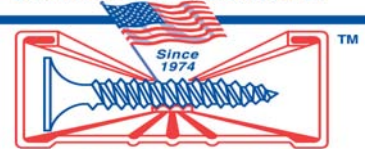

## Construction Screws

STEELER® Construction Screws are Produced in ISO 9002 & ISO 14001 Certified Environments and Meet or Exceed one or more of the following ASTM Designations: C 954, C 1002, or C 1513.

| DESCRIPTION  | PART #       | SIZE           | QTY/BOX | NET WT      | APPLICATION   |
|--|--------------|----------------|---------|-------------|---|
| <b>DRYWALL DRILLERS</b>  |              |                |         |             |   |
| <p>BUGLE HEAD "TEK"<br/>#2 PHILLIPS</p> <p>DEEP RECESS FAST DRILL TIME</p> | 13           | # 6 X 1"       | 10M     | 32.6        | 1/2" GYPSUM STEEL UP TO 12 GA.  |
|  | 13.5 & 13.5Z | # 6 X 1-1/8"   | 10M     | 37.2        | 5/8" GYPSUM STEEL UP TO 12 GA.  |
|  | 14 & 14Z     | # 6 X 1-1/4"   | 8M      | 31.8        | 5/8" GYPSUM STEEL UP TO 12 GA.  |
|  | 15 & 15Z     | # 6 X 1-5/8"   | 5M      | 25.5        | DOUBLE LAYERS OF GYPSUM UP TO 12 GA.  |
|  | 16 & 16Z     | # 6 X 1-7/8"   | 4M      | 23.5        | MULTIPLE LAYERS OF GYPSUM UP TO 12 GA.  |
|  | 30S          | # 8 X 2-3/8"   | 2M      | 18.5        |   |
|  | 30M & 30MZ   | # 8 X 2-5/8"   | 2M      | 20          |   |
|  | 30L          | # 8 X 3"       | 2M      | 23.8        |   |
| <b>CEMENT BOARD SCREWS</b>   |              |                |         |             |   |
|  | CB368        | # 8 X 1-1/4"   | 5M      |             | 1/2" C.B. TO WOOD OR 20-25 GA STEEL   |
|  | CB468        | # 8 X 1-5/8"   | 4M      |             | 5/8" C.B. TO WOOD OR 20-25 GA STEEL   |
|  | CB868        | # 8 X 2-1/4"   | 2M      |             | MULTI-LAYERS C.B. TO WOOD OR 20-25 GA STEEL   |
|  | CB14         | # 8 X 1-1/4"   | 5M      |             | 1/2" CEMENT BOARD TO 14-20 GA STEEL   |
|  | CB15         | # 8 X 1-5/8"   | 4M      |             | 5/8" CEMENT BOARD TO 14-20 GA STEEL   |
|  | CB30S        | # 8 X 2-1/4"   | 2M      |             | MULTI-LAYERS C.B. TO 14-20 GA STEEL   |
| <b>SUPER FRAMING DRILLERS</b>  |              |                |         |             |   |
| <p>PAN HEAD "TEK", #2 PHILLIPS</p>   | 19 & 19Z     | # 7 X 7/16"    | 15M     | 39.6        | FRAMING 20 GA. STEEL  |
|  | 20 & 20Z     | # 8 X 1/2"     | 10M     | 31.9        | FRAMING STEEL UP TO 14 GA.  |
|  | 40-12        | # 10 X 1/2"    | 10M     | 46.9        | PAN HEAD, ZINC  |
|  | 41Z SUPER-12 | # 10 X 1/2"    | 10M     | 44          | FLAT HEAD, ZINC   |
|  | 41ZSUPER     | # 10 X 3/4"    | 10M     | 59.4        | FLAT HEAD, ZINC   |
|  |              |                |         |             | DEEP RECESS FAST DRILL TIME   |
| <b>WAFER HEAD DRILLERS</b>   |              |                |         |             |   |
| <p>WAFER HEAD "TEK"<br/>#2 PHILLIPS</p>                                    | 34 & 34Z     | # 8 X 1/2"     | 10M     | 36.3        | EXTRA WIDE WASHER   |
|  | 35 & 35Z     | # 8 X 1"       | 5M      | 27.5        | METAL LATH TO STEEL & FRAMING STEEL UP TO 14 GA.  |
|  | 36 & 36Z     | # 8 X 1-1/4"   | 5M      | 31.9        | SUPER POINT   |
|  | 38(Z) SUPER  | # 8 X 1-3/4"   | 4M      | 32.6        | SUPER POINT, SUPER HEAD   |
|  | 50PZ         | # 10 X 5/8"    | 5M      | 27.5        | *SUPER POINT, SUPER HEAD*   |
|  | 44ZMAG       | # 10 X 3/4"    | 5M      | 30.8        | *FRAMING STEEL UP TO 12 GA.*  |
| <b>SUPER HEX DRILLERS</b>  |              |                |         |             |   |
| <p>HEX WASHER HEAD "TEK"</p> <p>OTHER GAUGES AND LENGTHS AVAILABLE</p>     | 26A & 26AZ   | # 8 X 1/2"     | 10M     | 31.9        | MULTI-PURPOSE SHEET METAL AND HVAC WORK, STEEL FRAMING AND METAL TO METAL APPLICATIONS<br>HEX HEADS ALLOWS FOR GREATER TORQUE WITHOUT CAMOUTS |
|  | 26BZ         | # 8 X 3/4"     | 10M     | 41.8        |   |
|  | 26C & 26CZ   | # 8 X 1"       | 8M      | 39.6        |   |
|  | 26EZ         | # 8 X 1-1/2"   | 5M      | 34.3        |   |
|  | 28AZ         | # 10 X 1/2"    | 10M     | 47.5        |   |
|  | 28BZ         | # 10 X 3/4"    | 5M      | 30.6        |   |
|  | 28CZ         | # 10 X 1"      | 8M      | 56.3        | HEAVY DUTY STEEL FRAMING<br>MULTI-LAYERS OF HEAVY GA. STEEL   |
|  | HWHTZ10-2    | # 10 X 2"      | 2M      | 24.2        |   |
|  | 29BZ         | # 12 X 3/4"    | 5M      | 37.8        |   |
|  | 29CZ         | # 12 X 1"      | 3M      | 29          |   |
|  | HWHTZ14-114  | # 14 X 1-1/4"  | 2M      | 34          |   |
| <b>SUPER #4 &amp; #5 PT HEX DRILLERS</b>                                   |              |                |         |             |   |
| <p>5/16" Hex Drive</p>   | HWHT4Z12-114 | # 12 X 1-1/4"  | 2M      | WITH WASHER | #4 POINT, 500 HR, ZINC + SEAL   |
|  | HWHT5Z12-114 | # 12 X 1-1/4"  | 2.5M    | NO WASHER   | #5 POINT, SILVER 1000 HR  |
| <b>PLY METAL DRILLERS</b>  |              |                |         |             |   |
| <p>REAMER TEK<br/>WINGED DRILLER</p>                                       | RT10-1716    | # 10 X 1-7/16" | 4M      | 38.3        | PLYWOOD OR COMPOSITE TO METAL<br>ALL REAMER TEK'S HAVE ZINC COATING   |
|  | RT10-212     | # 10 X 2-1/2"  | 1.5M    | 21.8        |   |
|  | RT12-2       | # 12 X 2"      | 1.5M    | 24          |   |
|  | RT12-212     | # 12 X 2-1/2"  | 1M      | 19.8        |   |
|  | RT12-258     | # 12 X 2-5/8"  | 1M      | 23          |   |
|  | RT12-234     | # 12 X 2-3/4"  | 1M      | 23.8        |   |
| <b>PILOT POINT DRILLERS</b>  |              |                |         |             |   |
|  | P81516F3     | #8 x 1-15/16"  | 4M      |             | PILOT POINT PRE-DRILLS THRU PLYWOOD, COMPOSITE, OR LAMINATED MATERIALS TO HEAVY GAUGE STEEL   |