




# Pony Wall Supports


## 1-800-275-2279

Part # 250PWS-68, 350PWS-68

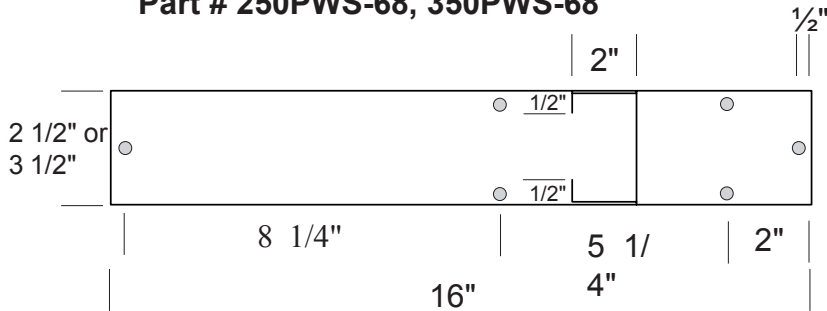

Custom Lengths Available  
 Up to 120" (10 feet)

30"  
 48"  
 60"

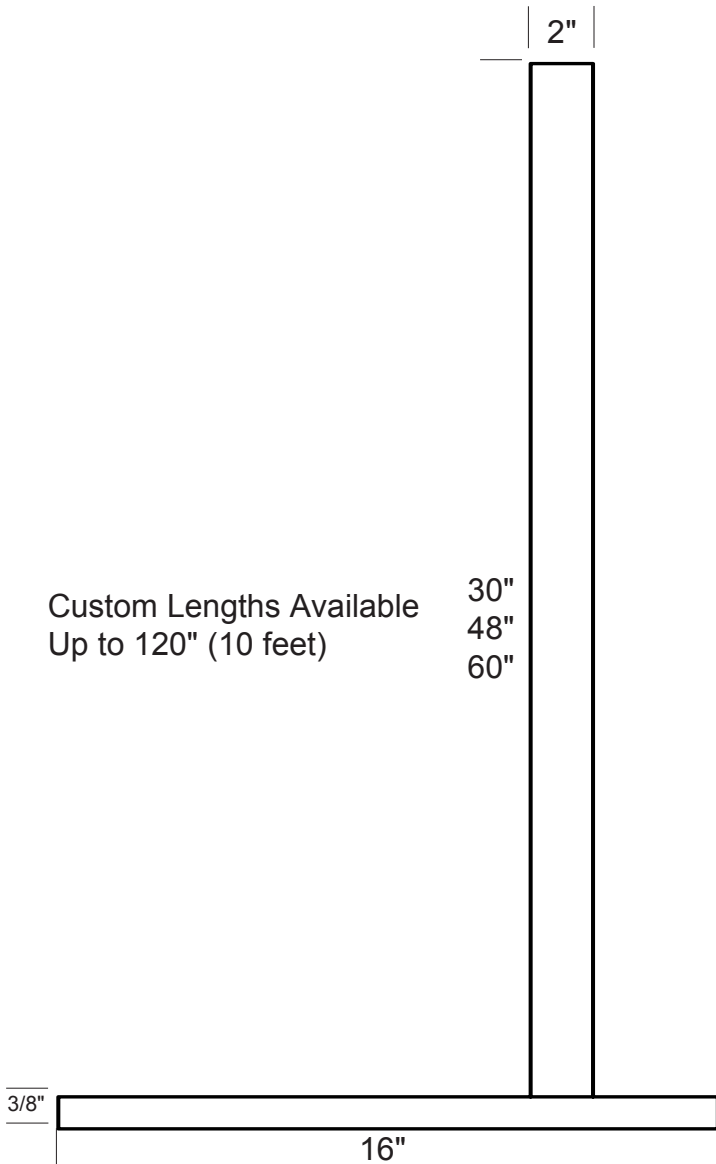

**STEELER INC.** will provide Pony Wall Supports to you on an as needed basis. We are able to provide custom heights for your special job requirements within reasonable lead times. At left is our standard stock Pony Wall Support with dimensioning variables to help you with your ordering. **STEELER** is not limited to our stock supports and with proper lead time we are able to supply variations on this design.

### Features and Benefits:

Steeler Pony Wall Supports have clear advantages over square tubing pony wall supports. Steeler Pony Wall Supports allow for easy screw access and do not need pre-drilling. Our screw #44Z-MAG can be used to attach up to 14 gauge steel studs to either side of the "C" channel. Steeler Pony Wall Supports save time and money.

### Materials

- Light gauge steel meeting the physical and galvanization requirements of A.S.T.M. A-653 or equal.
- Maximum recommended height is 40" but can be made to custom specifications such as 120". Stock lengths are 30" and 48".
- The upright is a 14 gauge "C" channel
- The bottom plate is 3/8" X 2 1/2" X 16" mild steel, or 3/8" X 3 1/2"
- The holes are 9/16" in diameter for anchors.
- The upright is welded to the bottom plate, cleaned and painted at the welded area at the same time the bottom plate is painted.

### Ordering information

Please be sure to provide quantity, heights, and any special instructions at time of order. Consult with your engineering firm before using this product.