




9320 Evergreen Blvd NW, Ste G
 Minneapolis, MN 55433
 Ph: 888.872.3487
 Fx: 763.795.8884
 www.radiustrack.com

Product Identification

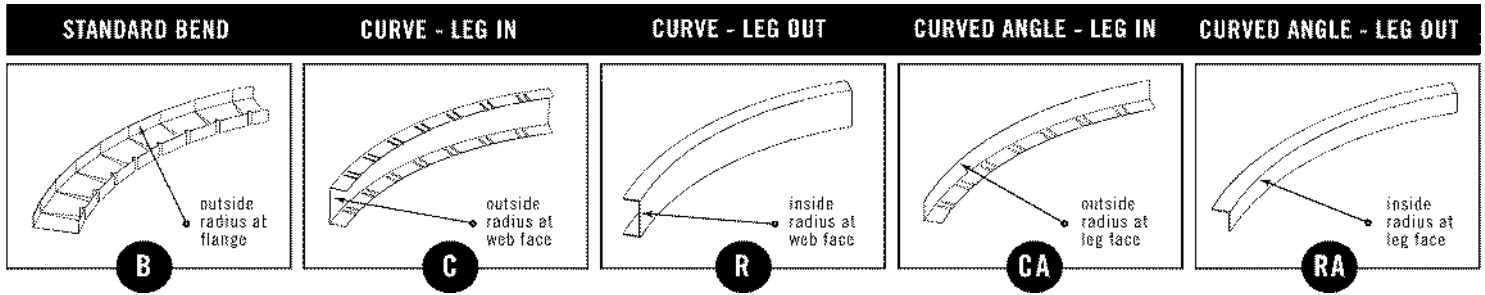

MEMBER DEPTH:

(Example: 3⁵/₈" = 362)
 All members are taken in 1/100 inches.

FLANGE WIDTH:

(Example: 1¹/₄" = 125)
 All members are taken in 1/100 inches.

CURVE TYPE:

The alpha characters utilized by the designator system are:

- B = Standard Bend
- C = Curve Leg In
- R = Curve Leg Out
- BSP, CSP, or RSP = Spline
- RB, RC, or BC = Compound Curve
- BF = Flange Bend (Hat Channel)
- BL = Lip Bend (Hat Channel)
- SBF = Flange Bend with Reverse
- SBL = Lip Bend with Reverse

MATERIAL:

An "X" in the part number indicates that the price includes the **Material** to be curved. If there is no "X" the price is for **Labor only**.

OTHER:

May be found at end of part number.



- 50K = 50 KSI
- G90 = G90 Coating
- P = Punched Stud
- 17-25 = Long Length
- 26-35 = Long Length

STYLE:

(Example: Track = T)
 The five alpha characters utilized by the designator system are:

- S = C-Stud / Joist
- T = Track
- ST = Slip Track
- F = Furring (Hat) Channel
- U = Channel (CRC) Sections
- A = Angle Sections

*Note: Material may be provided by any material manufacturer unless otherwise specified.

MATERIAL THICKNESS:

(Example: 0.033 in. = 33 mils)
 The five alpha characters utilized by the designator system are:

- 30 = 20 gauge "Drywall" flat stock
- 30 V = 20 gauge Equivalent (ex. Viper)
- 33 = 20 gauge "Structural"
- 43 = 18 gauge
- 54 = 16 gauge
- 68 = 14 gauge

Material thickness is the minimum base metal thickness in mils. Minimum base metal thickness represents 95% of the design thickness.

RADIUS CATEGORY:

(Example: Greater than 100" = 2)
 The two numeric characters utilized by the designator system are:

- 1 = Less than 100" Radius
- 2 = 100" Radius or Greater

